

60H 系列高压接头

4137 bar (60,000 psig)



接头
钢管
快速接头
过滤器
阀门
酸性介质产品
海底阀
型号互换表

目录

压盖 - HG



A-32

[安装说明](#)

A-112

轴环 - HCO



A-32

[接口信息](#)

A-02

堵头 - HTP



A-32

[型号说明](#)


A-36

管帽 - HTC




A-33

等径直通接头 - HU




A-33

变径直通接头 - HU




A-33

等径直通接头 (滑块型) - HSU




A-33

穿板固定接头 - HBU




A-34

等径弯头 - HLU




A-34

等径三通接头 - HT




A-35

等径四通接头 - HX



A-35

防振压盖 - HAV



A-36

接头

钢管

快速接头

过滤器

阀门

酸性介质产品


海底阀

型号互换表

特征

- ◎ 工作压力：4137 bar (60,000 psig)
- ◎ 工作温度范围：-252°C 至 649°C (-423°F 至 1200°F)
- ◎ 用于连接 T60H 系列无缝直管，适用于外径为 1/4"、3/8" 和 9/16" 的无缝直管
- ◎ 高强度 316 不锈钢材质
- ◎ 每个接头都刻有尺寸、材料和追溯码


结构

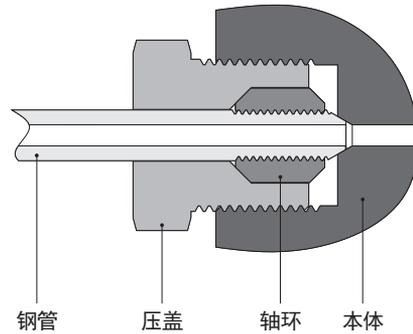

订购信息和尺寸


尺寸仅为参考，可能会有改变。

压盖




Tube 管			
T - Tube 管外径 in.	订购号	尺寸 in. (mm)	
		G	L
1/4	SS-HG-HF4	0.63 (15.9)	0.82 (20.8)
3/8	SS-HG-HF6	0.81 (20.6)	1.13 (28.7)
9/16	SS-HG-HF9	1.19 (30.2)	1.50 (38.1)

轴环



Tube 管			
T - Tube 管外径 in.	订购号	尺寸 in. (mm)	
		D	L
1/4	SS-HCO-HF4	0.38 (9.6)	0.38 (9.6)
3/8	SS-HCO-HF6	0.50 (12.7)	0.54 (13.7)
9/16	SS-HCO-HF9	0.81 (20.6)	0.62 (15.8)

堵头^①




Tube 管			
T - Tube 管外径 in.	订购号	尺寸 in. (mm)	
		D	L
1/4	SS-HTP-HF4	0.38 (9.6)	1.04 (26.4)
3/8	SS-HTP-HF6	0.50 (12.7)	1.35 (34.3)
9/16	SS-HTP-HF9	0.81 (20.6)	1.89 (48.0)

① 使用堵头时，不需要轴环。


A-33 60H 系列高压接头

管帽




Tube 管		尺寸 in. (mm)			
T - Tube 管外径 in.	订购号	L	C	G	F
1/4	SS-HTC-HF4	0.75 (19.1)	0.47 (11.9)	0.63 (15.9)	0.75 (19.1)
3/8	SS-HTC-HF6	1.13 (28.6)	0.61 (15.6)	0.81 (20.6)	1.00 (25.4)
9/16	SS-HTC-HF9	1.38 (34.9)	0.95 (24.1)	1.19 (30.2)	1.38 (34.9)

等径直通接头

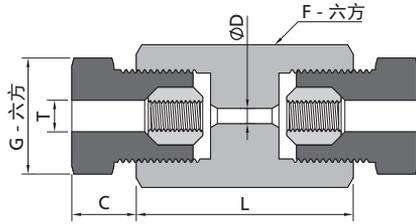


Tube 管		尺寸 in. (mm)				
T - Tube 管外径 in.	订购号	L	C	D	G	F
1/4	SS-HU-HF4	1.38 (34.9)	0.47 (11.9)	0.09 (2.4)	0.63 (15.9)	0.75 (19.1)
3/8	SS-HU-HF6	1.75 (44.5)	0.61 (15.6)	0.13 (3.2)	0.81 (20.6)	1.00 (25.4)
9/16	SS-HU-HF9	2.19 (55.6)	0.95 (24.1)	0.19 (4.8)	1.19 (30.2)	1.38 (34.9)

变径直通接头

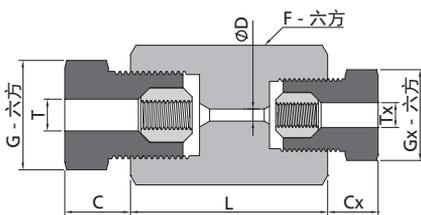


Tube 管		尺寸 in. (mm)							
T - Tube 管外径 in.	Tx - Tube 管外径 in.	订购号	L	C	Cx	D	G	Gx	F
3/8	1/4	SS-HU-HF6-HF4	1.63 (41.3)	0.61 (15.6)	0.47 (11.9)	0.09 (2.4)	0.81 (20.6)	0.63 (15.9)	1.00 (25.4)
9/16	1/4	SS-HU-HF9-HF4	1.75 (44.5)	0.95 (24.1)	0.47 (11.9)	0.09 (2.4)	1.19 (30.2)	0.63 (15.9)	1.38 (34.9)
9/16	3/8	SS-HU-HF9-HF6	2.00 (50.8)	0.95 (24.1)	0.61 (15.6)	0.13 (3.2)	1.19 (30.2)	0.81 (20.6)	1.38 (34.9)

等径直通接头 (滑块型)

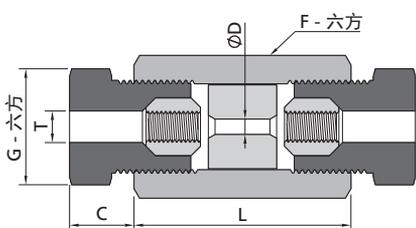

Tube 管		尺寸 in. (mm)				
T - Tube 管外径 in.	订购号	L	C	D	G	F
1/4	SS-HSU-HF4	1.38 (34.9)	0.47 (11.9)	0.09 (2.4)	0.63 (15.9)	0.75 (19.1)
3/8	SS-HSU-HF6	1.75 (44.5)	0.61 (15.6)	0.13 (3.2)	0.81 (20.6)	1.00 (25.4)
9/16	SS-HSU-HF9	2.19 (55.6)	0.95 (24.1)	0.19 (4.8)	1.19 (30.2)	1.38 (34.9)


穿板固定接头

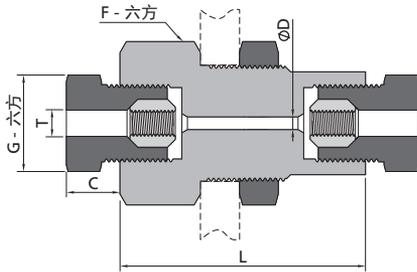

Tube 管

T - Tube 管外径 in.	订购号	尺寸 in. (mm)						
		L	C	D	G	F	面板孔 尺寸	最大面板 厚度
1/4	SS-HBU-HF4	1.88 (47.8)	0.47 (11.9)	0.09 (2.4)	0.63 (15.9)	1.06 (27.0)	0.94 (23.9)	0.38 (9.7)
3/8	SS-HBU-HF6	2.38 (60.5)	0.61 (15.6)	0.13 (3.2)	0.81 (20.6)	1.38 (34.9)	1.13 (28.6)	0.38 (9.7)
9/16	SS-HBU-HF9	2.75 (69.9)	0.95 (24.1)	0.19 (4.8)	1.19 (30.2)	1.88 (47.6)	1.69 (42.9)	0.38 (9.7)

等径弯头



Tube 管

T - Tube 管外径 in.	订购号	尺寸 in. (mm)					
		C	D	G	L	E	L1
1/4	SS-HLU-HF4	0.47 (11.9)	0.09 (2.4)	0.63 (15.9)	1.50 (38.1)	0.88 (22.4)	1.00 (25.4)
3/8	SS-HLU-HF6	0.61 (15.6)	0.13 (3.2)	0.81 (20.6)	2.00 (50.8)	1.25 (31.8)	1.50 (38.1)
9/16	SS-HLU-HF9	0.95 (24.1)	0.19 (4.8)	1.19 (30.2)	2.62 (66.5)	1.88 (47.8)	1.88 (47.8)

T - Tube 管外径 in.	订购号	尺寸 in. (mm)				
		E1	F ^②	F1 ^②	J ^②	厚度
1/4	SS-HLU-HF4	0.62 (15.7)	0.65 (16.5)	0.46 (11.7)	0.22 (5.6)	0.75 (19.1)
3/8	SS-HLU-HF6	1.00 (25.4)	0.69 (17.5)	0.72 (18.3)	0.26 (6.6)	1.00 (25.4)
9/16	SS-HLU-HF9	1.12 (28.4)	0.94 (24.0)	0.83 (21.1)	0.33 (8.4)	1.50 (38.1)

① 要订购带安装孔的接头，请在订购号后添加“-PM”。

② 仅适用于“-PM”型号。

接头

钢管

快速接头

过滤器

阀门


酸性介质产品

海底阀

型号互换表

A-35 60H 系列高压接头

等径三通接头

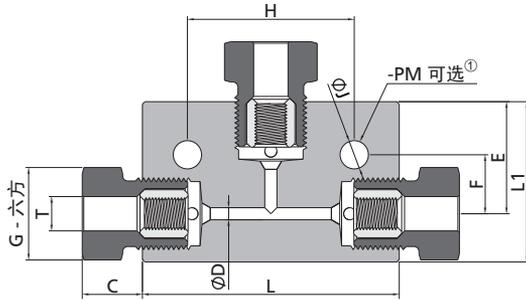


Tube 管		尺寸 in. (mm)				
T - Tube 管外径 in.	订购号	C	D	G	L	L1
1/4	SS-HT-HF4	0.47 (11.9)	0.09 (2.4)	0.63 (15.9)	2.00 (50.8)	1.25 (31.8)
3/8	SS-HT-HF6	0.61 (15.6)	0.13 (3.2)	0.81 (20.6)	2.00 (50.8)	1.56 (39.6)
9/16	SS-HT-HF9	0.95 (24.1)	0.19 (4.8)	1.19 (30.2)	2.62 (66.5)	2.12 (53.8)

T - Tube 管外径 in.	订购号	尺寸 in. (mm)				
		E	F ^②	H ^②	J ^②	厚度
1/4	SS-HT-HF4	0.88 (22.4)	0.46 (11.7)	1.30 (33.0)	0.22 (5.6)	0.75 (19.1)
3/8	SS-HT-HF6	1.06 (26.9)	0.72 (18.3)	1.38 (35.0)	0.26 (6.6)	1.00 (25.4)
9/16	SS-HT-HF9	1.38 (35.0)	0.83 (21.1)	1.89 (48.0)	0.33 (8.4)	1.50 (38.1)

- ① 要订购带安装孔的接头，请在订购号后添加“-PM”。
- ② 仅适用于“-PM”型号。

等径四通接头

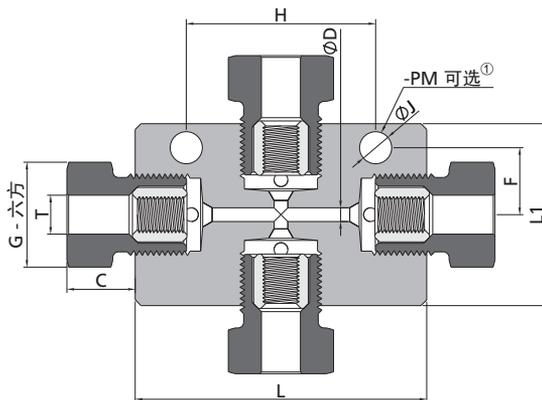

Tube 管		尺寸 in. (mm)								
T - Tube 管外径 in.	订购号	C	D	G	L	L1	F ^②	H ^②	J ^②	厚度
1/4	SS-HX-HF4	0.47 (11.9)	0.09 (2.4)	0.63 (15.9)	2.00 (50.8)	1.25 (31.8)	0.46 (11.7)	1.30 (33.0)	0.22 (5.6)	0.75 (19.1)
3/8	SS-HX-HF6	0.61 (15.6)	0.13 (3.2)	0.81 (20.6)	2.00 (50.8)	2.12 (53.8)	0.72 (18.3)	1.38 (35.0)	0.26 (6.6)	1.00 (25.4)
9/16	SS-HX-HF9	0.95 (24.1)	0.19 (4.8)	1.19 (30.2)	2.62 (66.5)	2.75 (69.9)	0.83 (21.1)	1.89 (48.0)	0.33 (8.4)	1.50 (38.1)


- ① 要订购带安装孔的接头，请在订购号后添加“-PM”。
- ② 仅适用于“-PM”型号。

防振压盖

工作压力：4137 bar (60,000 psig)

管路系统可能会承受极度地振动或冲击。在这种情况下，标准压盖连接可能会过早地失效，而防振压盖组件可以替换标准压盖，延长管路系统的振动疲劳寿命。

防振压盖的完整订购号 (例如：SS-HAV-HF4) 包括压盖螺母和弹性夹头。要订购带有防振压盖的组件，请在订购号上添加“-AV”。

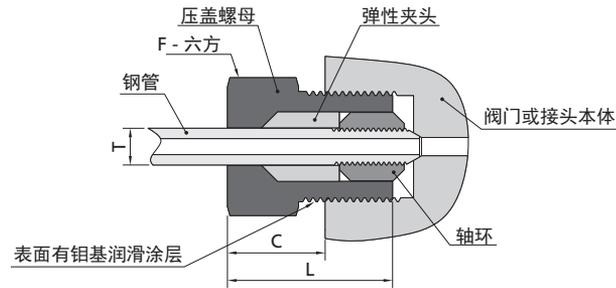

Tube 管					
防振压盖	T - Tube 管外径 in.	订购号	尺寸 in. (mm)		
			L	C	F
	1/4	SS-HAV-HF4	0.81 (20.6)	0.47 (11.9)	0.63 (15.9)
	3/8	SS-HAV-HF6	1.12 (28.4)	0.61 (15.6)	0.81 (20.6)
	9/16	SS-HAV-HF9	1.50 (38.1)	0.95 (24.1)	1.19 (30.2)

安装说明

见 A-112。

接口信息

见 A-02。

型号说明

